


STRUCTURE

Exterior pillars	every 2,0 m.
Interior pillars	every 4,0 m.
Height under the gutter	3,5 m. 4,0 m. 4,5 m. 5,0 m. 5,5 m. 6,0 m.

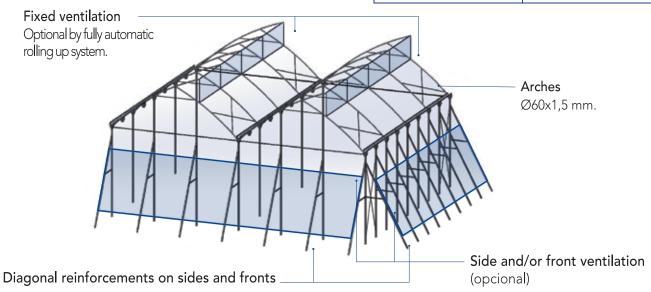

CHARACTERISTICS

Ventilation

(%)

The design allows fixed zenithal ventilation, with the possibility of opening and closing by fully automatic rolling up system.



Luminosity

The structure allows a luminosity by having the arches every 4 m.



Temperature

Thanks to the large volume of air, there is greater stability in the interior temperature.



Competitive Structure



Complementary facilities

This model allows the placement of thermal or shading screen.



Cultivation

Ideal for agricultural production.